


Oktopus GmbH
Kieler Straße 51
24549 Hohenwestedt, Germany
t +49 4871 490316
f +49 4871 490315
info@oktopus-mari-tech.de

Oktopus GmbH Technik
Wischhofstr. 1-3, Gebäude 13
24148 Kiel, Germany
t +49 431 7209350
f +49 431 7209356
www.oktopus-kiel.de

OktoDT 401– Data sheet

time delay module for stand-alone camera and light (OktoCam and OktoLED)

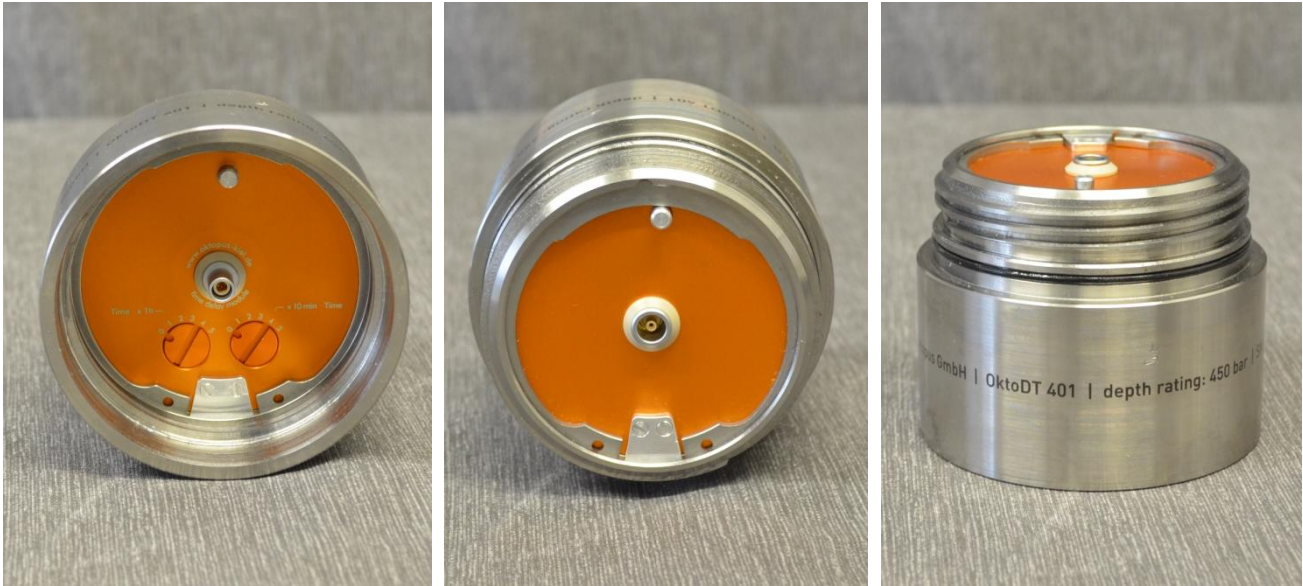

1 Mechanical

Max. diving depth:	4,500 m (greater / less depth on request)
Dimensions battery container (Ød x l):	Ø 95 mm x 77 mm
Weight (in air / in water):	1.6 kg / 0.7 kg

2 Electrical

Nominal input voltage:	14.4 V
Max. input current:	5 A

3 Features

Time delay min.:	0 h 0 min
Time delay max.:	5 h 50 min
Step size:	10 min

5 Thermal

Operating temperature:	-10 ... +40 °C
Storage temperature:	-20 ... +50 °C