


## OktoLED 433 / 434 / 435 – Data sheet

stand-alone, dimmable and via bluetooth (optional) configurable 31 W LED floodlight

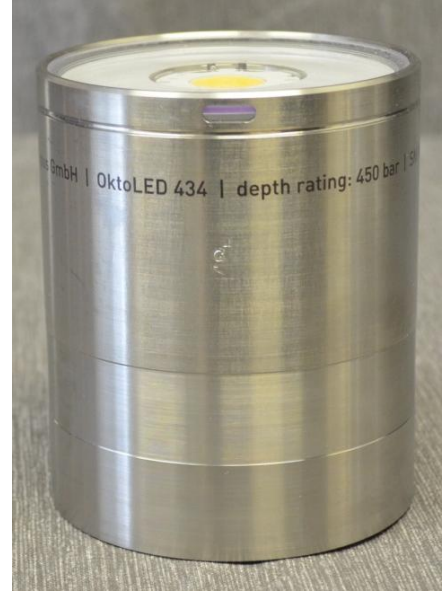

### 1 Mechanical

Max. diving depth: 4,500 m (other depth on request)  
Dimensions light (Ød x l): Ø 95 mm x 114 mm  
Weight (in air / in water): 1 kg / 0.4 kg

### 2 Electrical

Nominal input voltage: 12 V (10 ... 18 V)  
Max. current: 4 A  
Recommended battery container: OktoAcc 405

### 3 Optical

Nominal power: 31 W  
Luminous flux: > 4,000 lm  
Color temperature:  
433: 3.000 K  
434: 4.000 K  
435: 5.000 K  
Dimming: in 10 steps  
Angle (in water): 100°

### 4 Features

Operating time: 1.75 h (full power)  
Bluetooth (optional): wireless control for mode selection, on and off time in interval mode and dimming

### 5 Thermal

Operating temperature: -10 ... +40 °C  
Storage temperature: -20 ... +50 °C